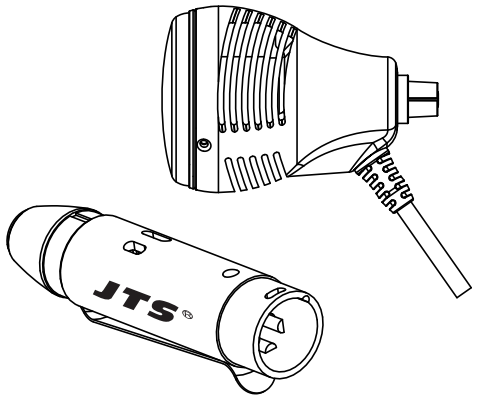

CX-520(D) / MA-500

口琴麥克風／幻象電源轉接頭

CX-520(D)來自JTS最具代表性的D-25音頭家族，平順的頻率響應與寬廣的動態表現讓CX-520(D)適用於自然音階與半音階口琴，精心設計的本體輪廓方便樂手找到最佳的共鳴腔體，是專業口琴表演者的最佳選擇。

- 超心型指向性
- 金屬本體能有效阻隔觸摸雜音進入麥克風
- 金屬鋼網搭配遮風罩能有效過濾氣聲
- ON/OFF與音量調整

適合用於

- 口琴
- 人聲
- 長笛
- 打擊樂器

內容物

1. CX-520(D) 口琴麥克風： 1 件
2. MA-500幻象電源轉接頭： 1 件 (CX-520標配)





規格

CX-520(D)

音頭型態.....	動圈式音頭
頻率響.....	50~16,500 Hz
指向性.....	超心型指向性
感度(1kHz).....	-78±3dB*(0.125mV)*0dB=1V/μbar
最大承受音壓1% T.H.D.	600Ω
輸出接頭.....	CX-520: 4P迷你XLR
	CX-520D: 6.3式插頭
導線長度.....	CX-520: 1.5m
	CX-520D: 6m
重量.....	470公克 (不包含導線)

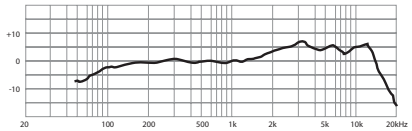



MA-500(CX-520標配)

麥克風輸入.....	4P 迷你XLR(Male)
輸出.....	XLR(Male)
幻像電源.....	12~48VDC
PAD	-10dB
LOW CUT.....	100Hz -6dB
	400Hz -4dB
頻率響應.....	30 ~ 20,000Hz
電阻.....	220Ω
THD.....	<0.045%@1KHz -50dB
訊噪比.....	>95 dB
重量.....	40公克
尺寸.....	φ20mm(寬)*94.5mm(高)

Input: 4P Mini XLR (Male)
Pin 1: GND
Pin 2: V+
Pin 3,4: Audio signal



Output: XLR (Male)
Pin 1: GND
Pin 2,3: Audio signal
(Phantom Power Supply)



CX-520(D) / MA-500

口琴麥克風／幻象電源轉接頭

音量控制



音量控制按鈕

Please maintain the temperature in proper status it helps the Subminiature Condenser Instrument Microphone to lengthen its life.
Using the part and adapter made from JTS to ensure the unit quality and lifetime. Do not attempt to employ non-standard adapters or connectors as you might damage the unit

JTS PROFESSIONAL CO., LTD.

59010-