TK-680

JTS®

Professional Microphone

Feature

TK-680 features newest D-36K capsule, which possesses a wide frequency response and exceptional directivity. Our design ensures perfect capture of vocal performance while preventing any unwanted feedback in enclose spaces. The durable body construction makes TK-680 ideal commercial microphone.

Specification

Type	Moving Coil Dynamic
Polar Pattern	Supercardioid,rotationally symmetrical about microphone axis,uniform with frequency
Frequency Response	40 ~ 16,500 Hz
Sensitivity	-75±3dB*(0.18mV)*0dB=1V/μbar, 1KHz
Impedance	600Ω
Phasing	Positive pressure on diaphragm produces positive voltage on pin2 with respect to pin3
Connector	Three-pin professional audio connector (male XLR type)

Frequency Response :

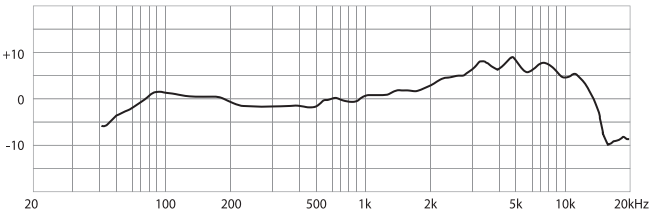

Polar Pattern :



JTS® PROFESSIONAL CO., LTD.
No. 148, 9th Industry Road, Ta-Li Industrial Park,
Taichung City, Taiwan.
Tel: 886-4-24938803 Fax: 886-4-24914890
E-mail: jts@jts.com.tw
www.jts.com.tw

59010-217-01